



Sky Paragliders a.s.
Mr. Nemeč Martin
Okružní 39
73911 Frýdlant nad Ostravicí
Czech Republic

Certificate EN

The hereunder sample of paraglider has been tested
in accordance with the following standards:
EN 926-2:2005 & EN 926-1:2006

AIR TURQUOISE SA certified by



Certification number	PG_0449.2011
Manufacturer	Sky Paragliders a.s.
Glider model	Antea 2 S
Category	C
Maximum weight in flight (kg)	80 kg
Minimum weight in flight (kg)	60 kg
Glider's weight (kg)	4.5 kg

Date of flight test

Flight tests	07. 07. 2011
Serial number	M1155-11-0469

Best Regards,

Alain Zoller

Randi Eriksen



Flight test report: EN

Manufacturer	Sky Paragliders a.s.	Certification number	PG_0449.2011
Address	Okružní 39 73911 Frýdlant nad Ostravicí Czech Republic	Date of flight test	07. 07. 2011
Representative	None	Place of test	Villeneuve
Glider model	Antea 2 S	Classification	C
Trimmer	no		

Test pilot	Dupont Philippe	Thurnheer Claude
Harness	Sup'Air - Altiplume S	Sup' Air - Altiplume S
Total weight in flight (kg)	60	80

Test Item	Result	Grade	Remarks	Grade
1. Inflation/Take-off	A			
Rising behaviour	Smooth, easy and constant rising	A	Smooth, easy and constant rising	A
Special take off technique required	No	A	No	A
2. Landing	A			
Special landing technique required	No	A	No	A
3. Speed in straight flight	A			
Trim speed more than 30 km/h	Yes	A	Yes	A
Speed range using the controls larger than 10 km/h	Yes	A	Yes	A
Minimum speed	Less than 25 km/h	A	Less than 25 km/h	A
4. Control movement	A			
<i>Max. weight in flight up to 80 kg</i>				
Symmetric control pressure / travel	Increasing / greater than 55 cm	A	not available	0
<i>Max. weight in flight 80 kg to 100 kg</i>				
Symmetric control pressure / travel	not available	0	Increasing / greater than 60 cm	A
<i>Max. weight in flight greater than 100 kg</i>				
Symmetric control pressure / travel	not available	0	not available	0
5. Pitch stability exiting accelerated flight	A			
Dive forward angle on exit	Dive forward less than 30°	A	Dive forward less than 30°	A
Collapse occurs	No	A	No	A
6. Pitch stability operating controls during accelerated flight	A			
Collapse occurs	No	A	No	A
7. Roll stability and damping	A			
Oscillations	Reducing	A	Reducing	A
8. Stability in gentle spirals	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
9. Behaviour in a steeply banked turn	B			
Sink rate after two turns	More than 14 m/s	B	More than 14 m/s	B
10. Symmetric front collapse	A			
Entry	Rocking back less than 45°	A	Rocking back less than 45°	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 0° to 30° / Keeping course	A
Cascade occurs	No	A	No	A
<i>With accelerator</i>				
Entry	Rocking back less than 45°	A	Rocking back less than 45°	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A

Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 0° to 30° / Keeping course	A
Cascade occurs	No	A	No	A
11. Exiting deep stall (parachutal stall)	A			
Deep stall achieved	Yes	A	Yes	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Change of course	Changing course less than 45°	A	Changing course less than 45°	A
Cascade occurs	No	A	No	A
12. High angle of attack recovery	C			
Recovery	Spontaneous in 3 s to 5 s	C	Spontaneous in less than 3 s	A
Cascade occurs	No	A	No	A
13. Recovery from a developed full stall	A			
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Collapse	No collapse	A	No collapse	A
Cascade occurs (other than collapses)	No	A	No	A
Rocking back	Less than 45°	A	Less than 45°	A
Line tension	Most lines tight	A	Most lines tight	A
14. Asymmetric collapse	C			
<i>With 50% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 15° to 45°	A	Less than 90° / Dive or roll angle 15° to 45°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	90° to 180° / Dive or roll angle 45° to 60°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 50% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 15° to 45°	A	Less than 90° / Dive or roll angle 15° to 45°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	90° to 180° / Dive or roll angle 45° to 60°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	Yes, no turn reversal	C
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
15. Directional control with a maintained asymmetric collapse	A			
Able to keep course	Yes	A	Yes	A
180° turn away from the collapsed side possible in 10 s	Yes	A	Yes	A
Amount of control range between turn and stall or spin	More than 50 % of the symmetric control travel	A	More than 50 % of the symmetric control travel	A

16. Trim speed spin tendency	A			
Spin occurs	No	A	No	A
17. Low speed spin tendency	A			
Spin occurs	No	A	No	A
18. Recovery from a developed spin	A			
Spin rotation angle after release	Stops spinning in less than 90°	A	Stops spinning in less than 90°	A
Cascade occurs	No	A	No	A
19. B-line stall	A			
Change of course before release	Changing course less than 45°	A	Changing course less than 45°	A
Behaviour before release	Remains stable with straight span	A	Remains stable with straight span	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Cascade occurs	No	A	No	A
20. Big ears	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
21. Big ears in accelerated flight	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Behaviour immediately after releasing the accelerator while maintaining big ears	Stable flight	A	Stable flight	A
22. Behaviour exiting a steep spiral	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
Turn angle to recover normal flight	Less than 720°, spontaneous recovery	A	Less than 720°, spontaneous recovery	A
Sink rate when evaluating spiral stability [m/s]	16		19	
23. Alternative means of directional control	A			
180° turn achievable in 20 s	Yes	A	Yes	A
Stall or spin occurs	No	A	No	A
24. Any other flight procedure and/or configuration described in the user's manual	0			
Procedure works as described	not available	0	not available	0
Procedure suitable for novice pilots	not available	0	not available	0
Cascade occurs	not available	0	not available	0
25. Comments of test pilot				
Comments				

Sky Paragliders a.s.
Mr. Nemeč Martin
Okružní 39
73911 Frýdlant nad Ostravicí
Czech Republic

Certificate EN

The hereunder sample of paraglider has been tested
in accordance with the following standards:
EN 926-2:2005 & EN 926-1:2006

AIR TURQUOISE SA certified by



Certification number **PG_0436.2011**
Manufacturer **Sky Paragliders a.s.**
Glider model **Antea 2 M**
Category **C**
Maximum weight in flight (kg) **120 kg**
Minimum weight in flight (kg) **75 kg**
Glider's weight (kg) **4.7 kg**

Date of flight test


Flight tests **13. 05. 2011**
Serial number **m 1153 11 0261**

Best Regards,

Alain Zoller



Randi Eriksen





Flight test report: EN

Manufacturer	Sky Paragliders a.s.	Certification number	PG_0436.2011
Address	Okružní 39 73911 Frýdlant nad Ostravicí Czech Republic	Date of flight test	13. 05. 2011
Representative	None	Place of test	Villeneuve
Glider model	Antea 2 M	Classification	C
Trimmer	no		

Test pilot	Thurnheer Claude	Zoller Alain
Harness	Sup' Air - Altiplume S	Gin Gliders - Gingo 2 L
Total weight in flight (kg)	75	120

Test Item	Result	Grade	Remarks	Grade
1. Inflation/Take-off	A			
Rising behaviour	Smooth, easy and constant rising	A	Smooth, easy and constant rising	A
Special take off technique required	No	A	No	A
2. Landing	A			
Special landing technique required	No	A	No	A
3. Speed in straight flight	B			
Trim speed more than 30 km/h	Yes	A	Yes	A
Speed range using the controls larger than 10 km/h	Yes	A	Yes	A
Minimum speed	Less than 25 km/h	A	25 km/h to 30 km/h	B
4. Control movement	C			
<i>Max. weight in flight up to 80 kg</i>				
Symmetric control pressure / travel	Increasing / greater than 55 cm	A	not available	0
<i>Max. weight in flight 80 kg to 100 kg</i>				
Symmetric control pressure / travel	not available	0	not available	0
<i>Max. weight in flight greater than 100 kg</i>				
Symmetric control pressure / travel	not available	0	Increasing / 50 cm to 65 cm	C
5. Pitch stability exiting accelerated flight	A			
Dive forward angle on exit	Dive forward less than 30°	A	Dive forward less than 30°	A
Collapse occurs	No	A	No	A
6. Pitch stability operating controls during accelerated flight	A			
Collapse occurs	No	A	No	A
7. Roll stability and damping	A			
Oscillations	Reducing	A	Reducing	A
8. Stability in gentle spirals	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
9. Behaviour in a steeply banked turn	B			
Sink rate after two turns	More than 14 m/s	B	More than 14 m/s	B
10. Symmetric front collapse	C			
Entry	Rocking back less than 45°	A	Rocking back less than 45°	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 0° to 30° / Keeping course	A
Cascade occurs	No	A	No	A
<i>With accelerator</i>				
Entry	Rocking back less than 45°	A	Rocking back greater than 45°	C
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A

Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 0° to 30° / Keeping course	A
Cascade occurs	No	A	No	A
11. Exiting deep stall (parachutal stall)	A			
Deep stall achieved	Yes	A	Yes	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Change of course	Changing course less than 45°	A	Changing course less than 45°	A
Cascade occurs	No	A	No	A
12. High angle of attack recovery	A			
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Cascade occurs	No	A	No	A
13. Recovery from a developed full stall	B			
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 30° to 60°	B
Collapse	No collapse	A	No collapse	A
Cascade occurs (other than collapses)	No	A	No	A
Rocking back	Less than 45°	A	Less than 45°	A
Line tension	Most lines tight	A	Most lines tight	A
14. Asymmetric collapse	C			
<i>With 50% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 15° to 45°	A	Less than 90° / Dive or roll angle 0° to 15°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	180° to 360° / Dive or roll angle 15° to 45°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 50% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 15° to 45°	A	90° to 180° / Dive or roll angle 15° to 45°	B
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	90° to 180° / Dive or roll angle 60° to 90°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
15. Directional control with a maintained asymmetric collapse	A			
Able to keep course	Yes	A	Yes	A
180° turn away from the collapsed side possible in 10 s	Yes	A	Yes	A
Amount of control range between turn and stall or spin	More than 50 % of the symmetric control travel	A	More than 50 % of the symmetric control travel	A

16. Trim speed spin tendency	A			
Spin occurs	No	A	No	A
17. Low speed spin tendency	A			
Spin occurs	No	A	No	A
18. Recovery from a developed spin	A			
Spin rotation angle after release	Stops spinning in less than 90°	A	Stops spinning in less than 90°	A
Cascade occurs	No	A	No	A
19. B-line stall	A			
Change of course before release	Changing course less than 45°	A	Changing course less than 45°	A
Behaviour before release	Remains stable with straight span	A	Remains stable with straight span	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Cascade occurs	No	A	No	A
20. Big ears	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
21. Big ears in accelerated flight	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Behaviour immediately after releasing the accelerator while maintaining big ears	Stable flight	A	Stable flight	A
22. Behaviour exiting a steep spiral	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
Turn angle to recover normal flight	Less than 720°, spontaneous recovery	A	Less than 720°, spontaneous recovery	A
Sink rate when evaluating spiral stability [m/s]	16		25	
23. Alternative means of directional control	A			
180° turn achievable in 20 s	Yes	A	Yes	A
Stall or spin occurs	No	A	No	A
24. Any other flight procedure and/or configuration described in the user's manual	0			
Procedure works as described	not available	0	not available	0
Procedure suitable for novice pilots	not available	0	not available	0
Cascade occurs	not available	0	not available	0
25. Comments of test pilot				
Comments				



Sky Paragliders a.s.
Mr. Nemeč Martin
Okružní 39
73911 Frýdlant nad Ostravicí
Czech Republic

Certificate EN

The hereunder sample of paraglider has been tested
in accordance with the following standards:
EN 926-2:2005 & EN 926-1:2006

AIR TURQUOISE SA certified by



Certification number	PG_0437.2011
Manufacturer	Sky Paragliders a.s.
Glider model	Antea 2 L
Category	C
Maximum weight in flight (kg)	135 kg
Minimum weight in flight (kg)	90 kg
Glider's weight (kg)	4.9 kg

Date of flight test

Flight tests	13. 05. 2011
Serial number	M 1153 11 0321
Load test	16. 04. 2011
Serial number	2011-04-11-0309

Best Regards,

Alain Zoller

Randi Eriksen

Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 0° to 30° / Keeping course	A
Cascade occurs	No	A	No	A
11. Exiting deep stall (parachutal stall)	A			
Deep stall achieved	Yes	A	Yes	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Change of course	Changing course less than 45°	A	Changing course less than 45°	A
Cascade occurs	No	A	No	A
12. High angle of attack recovery	A			
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Cascade occurs	No	A	No	A
13. Recovery from a developed full stall	B			
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 30° to 60°	B
Collapse	No collapse	A	No collapse	A
Cascade occurs (other than collapses)	No	A	No	A
Rocking back	Less than 45°	A	Less than 45°	A
Line tension	Most lines tight	A	Most lines tight	A
14. Asymmetric collapse	C			
<i>With 50% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 15° to 45°	A	Less than 90° / Dive or roll angle 15° to 45°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	90° to 180° / Dive or roll angle 45° to 60°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 50% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 15° to 45°	A	Less than 90° / Dive or roll angle 15° to 45°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	90° to 180° / Dive or roll angle 60° to 90°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
15. Directional control with a maintained asymmetric collapse	A			
Able to keep course	Yes	A	Yes	A
180° turn away from the collapsed side possible in 10 s	Yes	A	Yes	A
Amount of control range between turn and stall or spin	More than 50 % of the symmetric control travel	A	More than 50 % of the symmetric control travel	A

16. Trim speed spin tendency	A			
Spin occurs	No	A	No	A
17. Low speed spin tendency	A			
Spin occurs	No	A	No	A
18. Recovery from a developed spin	A			
Spin rotation angle after release	Stops spinning in less than 90°	A	Stops spinning in less than 90°	A
Cascade occurs	No	A	No	A
19. B-line stall	A			
Change of course before release	Changing course less than 45°	A	Changing course less than 45°	A
Behaviour before release	Remains stable with straight span	A	Remains stable with straight span	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Cascade occurs	No	A	No	A
20. Big ears	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
21. Big ears in accelerated flight	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Behaviour immediately after releasing the accelerator while maintaining big ears	Stable flight	A	Stable flight	A
22. Behaviour exiting a steep spiral	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
Turn angle to recover normal flight	Less than 720°, spontaneous recovery	A	Less than 720°, spontaneous recovery	A
Sink rate when evaluating spiral stability [m/s]	17		26	
23. Alternative means of directional control	A			
180° turn achievable in 20 s	Yes	A	Yes	A
Stall or spin occurs	No	A	No	A
24. Any other flight procedure and/or configuration described in the user's manual	0			
Procedure works as described	not available	0	not available	0
Procedure suitable for novice pilots	not available	0	not available	0
Cascade occurs	not available	0	not available	0
25. Comments of test pilot				
Comments				



Sky Paragliders a.s.
Mr. Nemeč Martin
Okružní 39
73911 Frýdlant nad Ostravicí
Czech Republic

Certificate EN

The hereunder sample of paraglider has been tested
in accordance with the following standards:
EN 926-2:2005 & EN 926-1:2006

AIR TURQUOISE SA certified by



Certification number	PG_0450.2011
Manufacturer	Sky Paragliders a.s.
Glider model	Antea 2 XL
Category	C
Maximum weight in flight (kg)	145 kg
Minimum weight in flight (kg)	105 kg
Glider's weight (kg)	5.1 kg

Date of flight test

Flight tests	10. 06. 2011
Serial number	M-1195-11-0472

Best Regards,

Alain Zoller

Randi Eriksen



Flight test report: EN

Manufacturer	Sky Paragliders a.s.	Certification number	PG_0450.2011
Address	Okružní 39 73911 Frýdlant nad Ostravicí Czech Republic	Date of flight test	10. 06. 2011
Representative	None	Place of test	Villeneuve
Glider model	Antea 2 XL	Classification	C
Trimmer	no		

Test pilot	Berruex Gilles	Zoller Alain
Harness	Gin Gliders - Gingo 2 L	Gin Gliders - Gingo 2 L
Total weight in flight (kg)	105	145

1. Inflation/Take-off	A			
Rising behaviour	Smooth, easy and constant rising	A	Smooth, easy and constant rising	A
Special take off technique required	No	A	No	A
2. Landing	A			
Special landing technique required	No	A	No	A
3. Speed in straight flight	B			
Trim speed more than 30 km/h	Yes	A	Yes	A
Speed range using the controls larger than 10 km/h	Yes	A	Yes	A
Minimum speed	25 km/h to 30 km/h	B	25 km/h to 30 km/h	B
4. Control movement	A			
<i>Max. weight in flight up to 80 kg</i>				
Symmetric control pressure / travel	not available	0	not available	0
<i>Max. weight in flight 80 kg to 100 kg</i>				
Symmetric control pressure / travel	not available	0	not available	0
<i>Max. weight in flight greater than 100 kg</i>				
Symmetric control pressure / travel	Increasing / greater than 65 cm	A	Increasing / greater than 65 cm	A
5. Pitch stability exiting accelerated flight	A			
Dive forward angle on exit	Dive forward less than 30°	A	Dive forward less than 30°	A
Collapse occurs	No	A	No	A
6. Pitch stability operating controls during accelerated flight	A			
Collapse occurs	No	A	No	A
7. Roll stability and damping	A			
Oscillations	Reducing	A	Reducing	A
8. Stability in gentle spirals	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
9. Behaviour in a steeply banked turn	B			
Sink rate after two turns	12 m/s to 14 m/s	A	More than 14 m/s	B
10. Symmetric front collapse	B			
Entry	Rocking back less than 45°	A	Rocking back less than 45°	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 0° to 30° / Keeping course	A
Cascade occurs	No	A	No	A
<i>With accelerator</i>				
Entry	Rocking back less than 45°	A	Rocking back less than 45°	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A

Dive forward angle on exit / Change of course	Dive forward 0° to 30° / Keeping course	A	Dive forward 30° to 60° / Keeping course	B
Cascade occurs	No	A	No	A
11. Exiting deep stall (parachutal stall)	A			
Deep stall achieved	Yes	A	Yes	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Change of course	Changing course less than 45°	A	Changing course less than 45°	A
Cascade occurs	No	A	No	A
12. High angle of attack recovery	A			
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Cascade occurs	No	A	No	A
13. Recovery from a developed full stall	B			
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 30° to 60°	B
Collapse	No collapse	A	No collapse	A
Cascade occurs (other than collapses)	No	A	No	A
Rocking back	Less than 45°	A	Less than 45°	A
Line tension	Most lines tight	A	Most lines tight	A
14. Asymmetric collapse	C			
<i>With 50% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	Less than 90° / Dive or roll angle 0° to 15°	A	Less than 90° / Dive or roll angle 15° to 45°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	90° to 180° / Dive or roll angle 45° to 60°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 50% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	90° to 180° / Dive or roll angle 15° to 45°	B	Less than 90° / Dive or roll angle 15° to 45°	A
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
<i>With 75% collapse and accelerator</i>				
Change of course until re-inflation / Maximum dive forward or roll angle	180° to 360° / Dive or roll angle 45° to 60°	C	90° to 180° / Dive or roll angle 60° to 90°	C
Re-inflation behaviour	Spontaneous re-inflation	A	Spontaneous re-inflation	A
Total change of course	Less than 360°	A	Less than 360°	A
Collapse on the opposite side occurs	No	A	No	A
Twist occurs	No	A	No	A
Cascade occurs	No	A	No	A
15. Directional control with a maintained asymmetric collapse	A			
Able to keep course	Yes	A	Yes	A
180° turn away from the collapsed side possible in 10 s	Yes	A	Yes	A
Amount of control range between turn and stall or spin	More than 50 % of the symmetric control travel	A	More than 50 % of the symmetric control travel	A

16. Trim speed spin tendency	A			
Spin occurs	No	A	No	A
17. Low speed spin tendency	A			
Spin occurs	No	A	No	A
18. Recovery from a developed spin	A			
Spin rotation angle after release	Stops spinning in less than 90°	A	Stops spinning in less than 90°	A
Cascade occurs	No	A	No	A
19. B-line stall	A			
Change of course before release	Changing course less than 45°	A	Changing course less than 45°	A
Behaviour before release	Remains stable with straight span	A	Remains stable with straight span	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Cascade occurs	No	A	No	A
20. Big ears	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
21. Big ears in accelerated flight	A			
Entry procedure	Standard technique	A	Standard technique	A
Behaviour during big ears	Stable flight	A	Stable flight	A
Recovery	Spontaneous in less than 3 s	A	Spontaneous in less than 3 s	A
Dive forward angle on exit	Dive forward 0° to 30°	A	Dive forward 0° to 30°	A
Behaviour immediately after releasing the accelerator while maintaining big ears	Stable flight	A	Stable flight	A
22. Behaviour exiting a steep spiral	A			
Tendency to return to straight flight	Spontaneous exit	A	Spontaneous exit	A
Turn angle to recover normal flight	Less than 720°, spontaneous recovery	A	Less than 720°, spontaneous recovery	A
Sink rate when evaluating spiral stability [m/s]	15		20	
23. Alternative means of directional control	A			
180° turn achievable in 20 s	Yes	A	Yes	A
Stall or spin occurs	No	A	No	A
24. Any other flight procedure and/or configuration described in the user's manual	0			
Procedure works as described	not available	0	not available	0
Procedure suitable for novice pilots	not available	0	not available	0
Cascade occurs	not available	0	not available	0
25. Comments of test pilot				
Comments				



Load test report EN

AIR TURQUOISE SA certified by



The model describe hereafter is in conformity with the load and shock tests carried out by:
para-test.com, official test laboratory of Switzerland
EN 926-1:2006

Manufacturer **Sky Paragliders a.s.**
Glider model **Antea 2 L**
Max. load (kg). **153 kg**



Shock test

1000 daN

The model had no appearant damages to question its airworthiness.

Mechanical resistance test


The model had been tested to 8G of it's total weight in flight during 3 sec

Villeneuve, 16. 04. 2011

Alain Zoller

Air Turquoise Homologations LOAD DIAGRAM

Route du Pré-au-Comte 8
CH-1844 Villeneuve
021 965 65 65 / info@airturquoise.ch

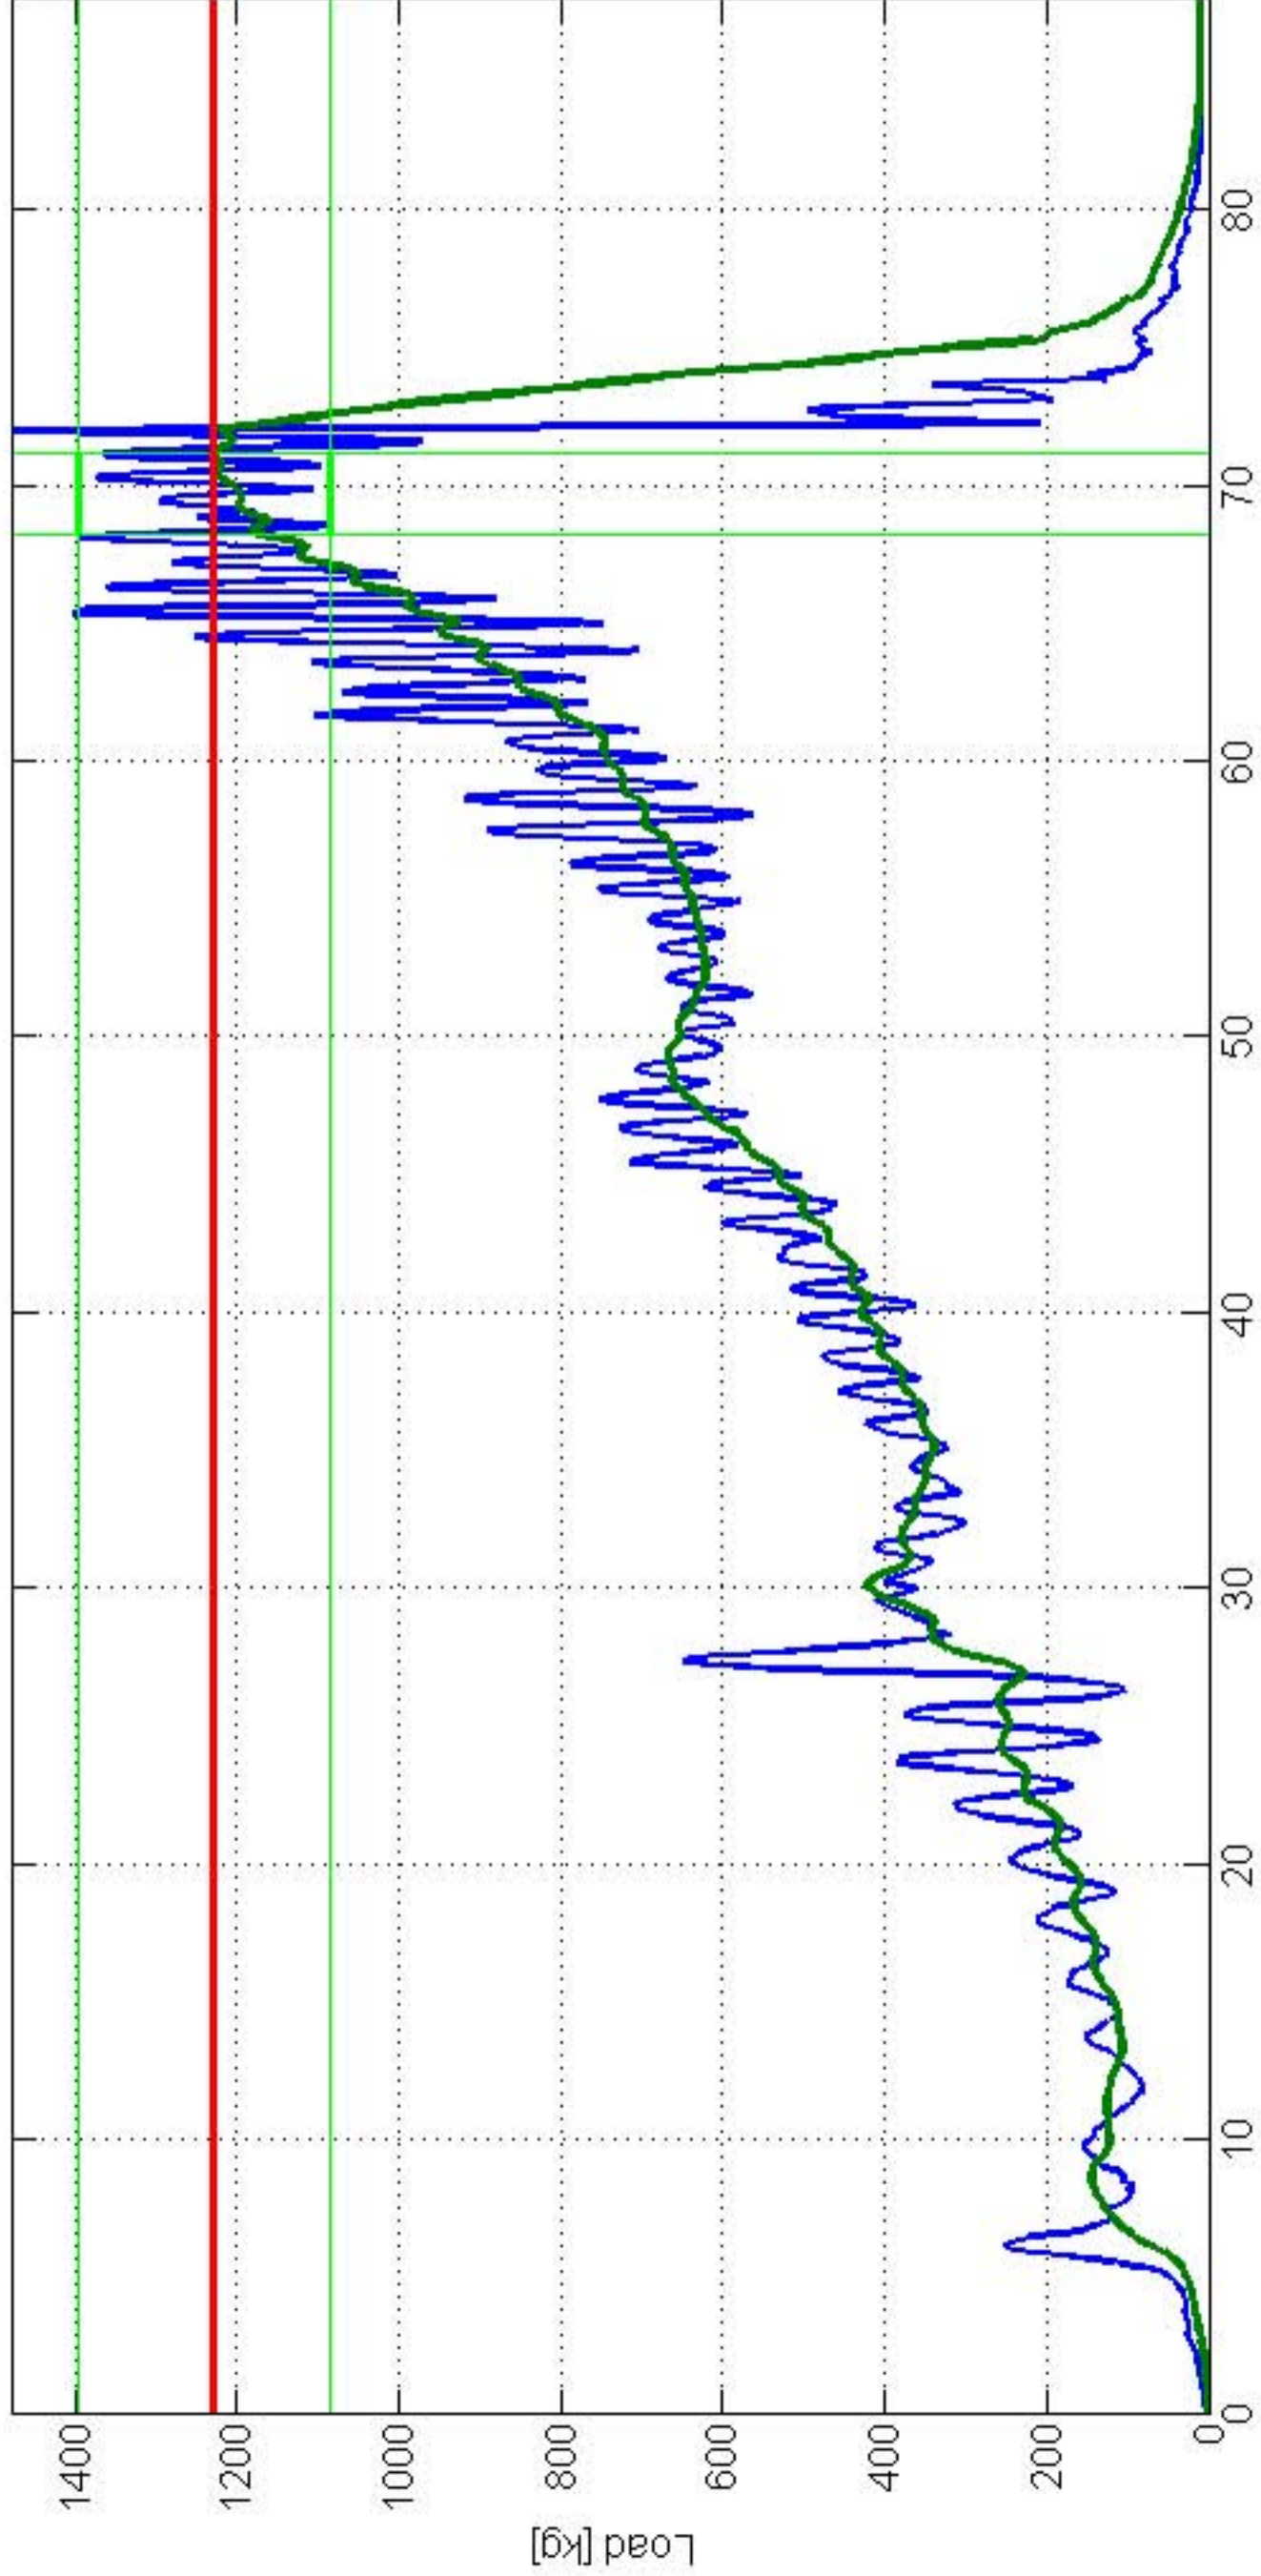

Sky Paragliders Antea 2 L

TEST PASSED at 1230 kg (3s avg)
16.4.2011 - 10:40
measurement with ShockRecord
(c) 2006 by Jonas Buchli <jonas@buchli.org>